

PROCHARGE SERIES CHARGERS

High-Efficiency Power.

Smart Technology.

Proven Reliability.

The ProCharge Series delivers intelligent, energy-efficient charging performance in a compact, rugged design. Built for industrial environments, these chargers offer flexible configurations, advanced communication capabilities, and exceptional efficiency. Whether you're charging conventional, opportunity, fast-charge, or lithium-ion batteries, ProCharge keeps your fleet powered, productive, and ready for every shift.

Key Benefits

- High Efficiency – 92% efficiency and 0.95 power factor for lower operating costs
- Versatile Operation – Compatible with conventional, opportunity, fast, and lithium charging modes
- Smart Communication – Wireless and USB connectivity for monitoring, data logging, and diagnostics
- Rugged Construction – Corrosion-resistant cabinet; stackable up to four units high
- Flexible Installation – Wall, rack, or floor mount options for easy integration
- Lower Total Cost of Ownership – Less maintenance, less downtime, more uptime

Advanced Features



- Multi-Circuit Design: Power multiple chargers through a single AC connection (2–8 units).
- High-Output Capability: Parallel configurations provide up to 40kW of fast charging.
- Battery Event Logging: Track charge cycles, usage, and fleet performance in real time.
- Smart Battery Management: FIFO-based “best battery” selection ensures even rotation and longer life.
- Fleet Connectivity: Optional cloud-based interface for remote viewing, reporting, and performance analytics.

Applications

- Multi-shift warehouse and distribution fleets
- Automated guided vehicles (AGVs) and pallet jacks
- High-throughput and cold-storage operations

Certifications & Compliance

- CEC Approved
- cUL Listed

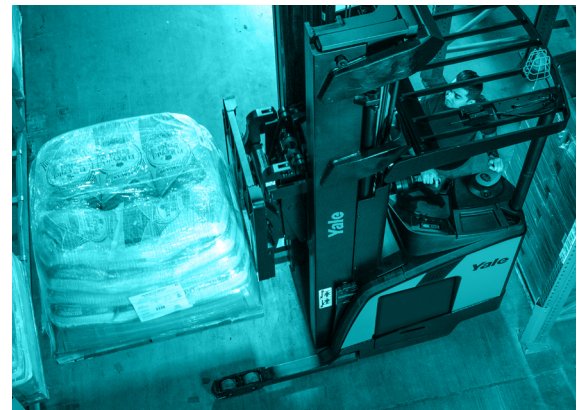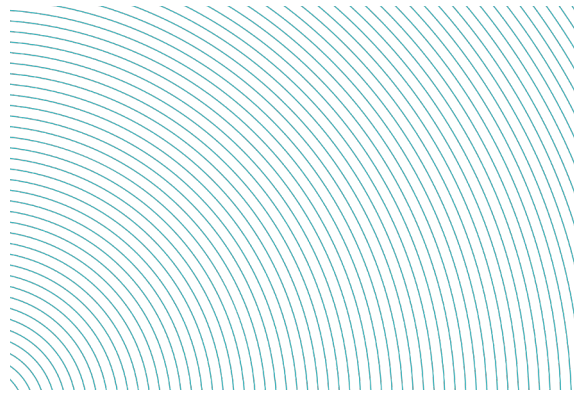

Specifications

Conventional 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-255-30	12 (24)	3	42	-	-	2	-	20	30
24-375-30	12 (24)	3	61	-	-	3	-	20	30
24-510-30	12 (24)	3	83	-	-	4	-	22	30
24-600-30	12 (24)	3	98	-	-	4	-	22	30
24-680-30	12 (24)	3	111	-	-	5	-	22	30
24-765-30	12 (24)	3	125	-	-	5	-	25	30
24-935-31	12 (24)	3	152	-	-	6	-	49	31
24-1045-31	12 (24)	3	170	-	-	7	-	49	31
24-1190-33	12 (24)	3	194	-	-	8	-	55	33
24-1350-33	12 (24)	3	220	-	-	9	-	55	33
36-255-30	18 (36)	3	42	-	-	3	-	20	30
36-375-30	18 (36)	3	61	-	-	4	-	20	30
36-510-30	18 (36)	3	83	-	-	5	-	22	30
36-650-30	18 (36)	3	105	-	-	6	-	22	30
36-765-31	18 (36)	3	125	-	-	8	-	49	31
36-935-31	18 (36)	3	152	-	-	9	-	49	31
36-1045-31	18 (36)	3	170	-	-	10	-	49	31
36-1190-33	18 (36)	3	194	-	-	12	-	57	33
36-1275-33	18 (36)	3	208	-	-	13	-	57	33
36-1350-33	18 (36)	3	220	-	-	13	-	57	33
36-1600-33	18 (36)	3	260	-	-	16	-	90	33
48-255-30	24 (48)	3	42	-	-	3	-	20	30
48-375-30	24 (48)	3	61	-	-	4	-	20	30
48-500-30	24 (48)	3	80	-	-	6	-	22	30
48-680-31	24 (48)	3	111	-	-	9	-	46	31
48-800-31	24 (48)	3	130	-	-	11	-	49	31
48-935-33	24 (48)	3	152	-	-	12	-	57	33
48-1010-33	24 (48)	3	165	-	-	14	-	57	33
48-1190-33	24 (48)	3	194	-	-	16	-	87	33
48-1350-33	24 (48)	3	222	-	-	18	-	87	33
48-1600-32	24 (48)	3	260	-	-	21	-	90	32
80-255-33	40 (80)	3	42	-	-	6	-	43	33
80-500-33	40 (80)	3	80	-	-	11	-	46	33
80-615-33	40 (80)	3	100	-	-	13	-	57	33
80-680-33	40 (80)	3	111	-	-	15	-	84	33
80-800-33	40 (80)	3	130	-	-	17	-	86	33
80-980-32	40 (80)	3	160	-	-	21	-	86	32
80-1045-32	40 (80)	3	170	-	-	22	-	89	32
80-1230-32	40 (80)	3	200	-	-	26	-	90	32



Conventional Low Voltage 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-255-30-L	12 (24)	3	42	4	4	-	-	20	30
24-375-30-L	12 (24)	3	61	7	6	-	-	20	30
24-510-30-L	12 (24)	3	83	8	7	-	-	22	30
24-600-30-L	12 (24)	3	98	9	8	-	-	22	30
24-680-30-L	12 (24)	3	111	10	9	-	-	22	30
24-765-30-L	12 (24)	3	125	12	10	-	-	22	30
24-935-31-L	12 (24)	3	152	14	12	-	-	49	31
24-1045-31-L	12 (24)	3	170	14	14	-	-	49	31
24-1190-32-L	12 (24)	3	194	18	16	-	-	55	32
24-1350-32-L	12 (24)	3	220	20	18	-	-	55	32
36-255-30-L	18 (36)	3	42	7	6	-	-	20	30
36-375-30-L	18 (36)	3	61	8	7	-	-	20	30
36-510-30-L	18 (36)	3	83	11	10	-	-	22	30
36-650-30-L	18 (36)	3	105	13	12	-	-	22	30
36-765-31-L	18 (36)	3	125	17	15	-	-	49	31
36-935-31-L	18 (36)	3	152	20	18	-	-	49	31
36-1045-31-L	18 (36)	3	170	23	20	-	-	49	31
36-1190-32-L	18 (36)	3	194	28	24	-	-	57	32
36-1275-32-L	18 (36)	3	208	30	26	-	-	60	32
36-1350-32-L	18 (36)	3	220	32	28	-	-	60	32
36-1600-32-L	18 (36)	3	260	37	32	-	-	90	32
48-255-30-L	24 (48)	3	42	7	6	-	-	20	30
48-375-30-L	24 (48)	3	61	9	8	-	-	20	30
48-500-30-L	24 (48)	3	83	15	13	-	-	22	30
48-680-31-L	24 (48)	3	111	20	17	-	-	46	31
48-800-31-L	24 (48)	3	130	23	20	-	-	49	31
48-935-32-L	24 (48)	3	152	28	24	-	-	57	32
48-1045-32-L	24 (48)	3	170	32	28	-	-	57	32
48-1190-32-L	24 (48)	3	194	35	30	-	-	87	32
48-1360-32-L	24 (48)	3	222	40	34	-	-	87	32
48-1600-32-L	24 (48)	3	260	47	40	-	-	90	32
80-255-31-L	40 (80)	3	42	12	11	-	-	43	31
80-500-31-L	40 (80)	3	80	24	21	-	-	46	31
80-680-32-L	40 (80)	3	111	33	28	-	-	84	32
80-800-32-L	40 (80)	3	130	38	33	-	-	87	32
80-980-32-L	40 (80)	3	160	47	41	-	-	87	32



Opportunity Charge 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-255-30OC	12 (24)	3	64	-	-	3	-	20	30
24-375-30OC	12 (24)	3	94	-	-	4	-	22	30
24-510-30OC	12 (24)	3	18	-	-	5	-	25	30
24-680-31OC	12 (24)	3	170	-	-	7	-	49	31
24-765-33OC	12 (24)	3	191	-	-	8	-	55	33
24-880-33OC	12 (24)	3	220	-	-	9	-	55	33
24-935-33OC	12 (24)	3	234	-	-	10	-	87	33
24-1045-33OC	12 (24)	3	260	-	-	11	-	90	33
24-1200-33OC	12 (24)	3	298	-	-	12	-	94	33
24-1445-32OC	12 (24)	3	361	-	-	15	-	97	32
36-255-30OC	18 (36)	3	64	-	-	4	-	20	30
36-420-30OC	18 (36)	3	105	-	-	6	-	22	30
36-510-31OC	18 (36)	3	128	-	-	8	-	46	31
36-680-31OC	18 (36)	3	170	-	-	10	-	49	31
36-765-33OC	18 (36)	3	191	-	-	12	-	55	33
36-880-33OC	18 (36)	3	220	-	-	13	-	55	33
36-935-33OC	18 (36)	3	234	-	-	14	-	87	33
36-1045-33OC	18 (36)	3	260	-	-	16	-	90	33
36-1200-33OC	18 (36)	3	298	-	-	18	-	90	33
36-1360-32OC	18 (36)	3	340	-	-	20	-	94	32
36-1445-32OC	18 (36)	3	360	-	-	22	-	97	32
36-1680-32OC	18 (36)	3	420	-	-	26	-	97	32
48-320-30OC	24 (48)	3	80	-	-	6	-	22	30
48-510-31OC	24 (48)	3	128	-	-	11	-	49	31
48-595-33OC	24 (48)	3	149	-	-	12	-	55	33
48-660-33OC	24 (48)	3	165	-	-	13	-	55	33
48-765-33OC	24 (48)	3	191	-	-	16	-	57	33
48-880-33OC	24 (48)	3	220	-	-	17	-	57	33
48-935-32OC	24 (48)	3	234	-	-	18	-	87	32
48-1045-32OC	24 (48)	3	260	-	-	21	-	90	32
48-1190-32OC	24 (48)	3	298	-	-	24	-	90	32
48-1275-32OC	24 (48)	3	319	-	-	25	-	90	32
48-1320-32OC	24 (48)	3	330	-	-	26	-	90	32
80-255-33OC	40 (80)	3	64	-	-	9	-	43	33
80-320-33OC	40 (80)	3	80	-	-	11	-	46	33
80-400-33OC	40 (80)	3	100	-	-	13	-	55	33
80-510-33OC	40 (80)	3	128	-	-	17	-	86	33
80-680-32OC	40 (80)	3	160	-	-	22	-	86	32
80-800-32OC	40 (80)	3	200	-	-	26	-	90	32



Opportunity Charge Low Voltage 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-255-30OC-L	12 (24)	3	64	6	6	-	-	20	30
24-375-30 OC-L		3	94	9	8	-	-	22	30
24-510-30 OC-L		3	128	12	10	-	-	25	30
24-680-31 OC-L		3	170	16	14	-	-	49	31
24-765-32 OC-L		3	191	18	16	-	-	87	32
24-880-32 OC-L		3	220	23	20	-	-	87	32
24-935-32 OC-L		3	234	23	20	-	-	90	32
24-1045-32 OC-L		3	260	25	22	-	-	94	32
24-1190-32 OC-L		3	298	29	25	-	-	94	32
36-255-30 OC-L	18 (36)	3	64	9	8	-	-	20	30
36-420-30 OC-L		3	105	13	12	-	-	22	30
36-510-31 OC-L		3	128	17	15	-	-	46	31
36-680-31 OC-L		3	170	23	20	-	-	49	31
36-765-32 OC-L		3	191	28	24	-	-	86	32
36-935-32 OC-L		3	234	33	29	-	-	86	32
36-1045-32 OC-L		3	260	37	32	-	-	90	32
36-1190-32 OC-L		3	298	42	36	-	-	90	32
36-1360-32 OC-L		3	340	48	41	-	-	94	32
48-320-30 OC-L	24 (48)	3	80	13	12	-	-	22	30
48-510-31 OC-L		3	128	23	20	-	-	49	31
48-595-32 OC-L		3	149	28	24	-	-	86	32
48-680-32 OC-L		3	170	30	26	-	-	86	32
48-765-32 OC-L		3	191	37	32	-	-	87	32
48-935-32 OC-L		3	234	42	36	-	-	87	32
48-1045-32 OC-L		3	260	49	43	-	-	90	32
80-255-31 OC-L	40 (80)	3	64	19	16	-	-	43	31
80-320-31 OC-L		3	80	24	21	-	-	46	31
80-510-32 OC-L		3	128	38	33	-	-	86	32
80-635-32 OC-L		3	160	47	41	-	-	86	32

Fast Charge 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-510-33FC	12 (24)	3	204	-	-	8	-	55	33
24-550-33 FC		3	220	-	-	9	-	55	33
24-600-33 FC		3	240	-	-	10	-	87	33
24-750-33 FC		3	306	-	-	12	-	90	33
24-880-32 FC		3	352	-	-	14	-	94	32
24-1050-32 FC		3	420	-	-	17	-	102	32
36-510-33 FC	18 (36)	3	204	-	-	12	-	55	33
36-550-33 FC		3	220	-	-	13	-	55	33
36-600-33 FC		3	240	-	-	14	-	87	33
36-750-33 FC		3	306	-	-	18	-	90	33
36-880-32 FC		3	352	-	-	20	-	94	32
36-1050-32 FC		3	420	-	-	26	-	102	32
48-550-33 FC	24 (48)	3	204	-	-	16	-	87	33
48-600-32 FC		3	240	-	-	19	-	90	32
48-765-32 FC		3	306	-	-	24	-	94	32
48-825-32 FC		3	330	-	-	26	-	94	32
80-500-32 FC	40 (80)	3	200	-	-	26	-	88	32



CEC Conventional 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-255-30	24	3	42	-	-	2	-	20	30
CA24-375-30	24	3	61	-	-	3	-	20	30
CA24-510-30	24	3	83	-	-	4	-	22	30
CA24-600-30	24	3	98	-	-	4	-	22	30
CA24-680-30	24	3	111	-	-	5	-	46	30
CA24-765-30	24	3	125	-	-	5	-	49	30
CA24-935-33	24	3	152	-	-	6	-	49	30
CA24-1045-33	24	3	170	-	-	7	-	49	33
CA24-1190-33	24	3	194	-	-	8	-	55	33
CA24-1350-33	24	3	220	-	-	9	-	55	33
CA36-510-30	36	3	80	-	-	5	-	25	30
CA36-650-30	36	3	105	-	-	6	-	25	30
CA36-765-33	36	3	125	-	-	8	-	49	33
CA36-935-33	36	3	152	-	-	9	-	49	33
CA36-1045-33	36	3	170	-	-	10	-	49	33
CA36-1190-33	36	3	194	-	-	12	-	57	33
CA36-1275-33	36	3	208	-	-	13	-	57	33
CA36-1350-33	36	3	220	-	-	13	-	57	33
CA36-1600-33	36	3	260	-	-	15	-	62	33
CA48-510-33	48	3	83	-	-	7	-	46	33
CA48-680-33	48	3	111	-	-	9	-	46	33
CA48-800-33	48	3	130	-	-	11	-	49	33
CA48-935-33	48	3	152	-	-	12	-	57	33
CA48-1010-33	48	3	165	-	-	14	-	57	33
CA48-1190-33	48	3	194	-	-	15	-	57	33
CA48-1380-33	48	3	220	-	-	17	-	57	33
CA80-300-33	80	3	42	-	-	6	-	43	33
CA80-500-33	80	3	80	-	-	11	-	46	33
CA80-615-33	80	3	100	-	-	13	-	57	33
CA80-680-32	80	3	111	-	-	15	-	84	32
CA80-800-32	80	3	130	-	-	17	-	86	32

CEC Conventional Low Voltage 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-255-30-L	24	3	42	4	4	-	-	20	30
CA24-375-30-L	24	3	61	7	6	-	-	20	30
CA24-510-30-L	24	3	83	9	8	-	-	22	30
CA24-600-30-L	24	3	83	9	8	-	-	22	30
CA24-680-30-L	24	3	111	11	10	-	-	22	30
CA24-765-30-L	24	3	125	12	10	-	-	25	30
CA24-935-31-L	24	3	152	14	12	-	-	49	31
CA24-1045-31-L	24	3	170	14	14	-	-	49	31
CA24-1190-32-L	24	3	194	18	16	-	-	55	32
CA24-1350-32-L	24	3	220	20	18	-	-	55	32
CA36-375-30-L	36	3	61	9	8	-	-	20	30
CA36-510-30-L	36	3	83	11	10	-	-	22	30
CA36-650-30-L	36	3	105	13	12	-	-	22	30
CA36-765-31-L	36	3	125	17	15	-	-	49	31
CA36-935-31-L	36	3	152	20	18	-	-	49	31
CA36-1045-31-L	36	3	170	23	20	-	-	49	31
CA36-1190-32-L	36	3	194	28	24	-	-	57	32
CA36-1275-32-L	36	3	208	30	26	-	-	60	32
CA36-1350-32-L	36	3	220	32	28	-	-	60	32
CA36-1600-32-L	36	3	260	37	32	-	-	90	32
CA48-500-30-L	48	3	80	13	12	-	-	22	30
CA48-680-31-L	48	3	111	20	17	-	-	46	31
CA48-800-31-L	48	3	130	23	20	-	-	49	31
CA48-935-32-L	48	3	152	28	24	-	-	57	32
CA48-1045-32-L	48	3	170	32	28	-	-	57	32
CA48-1190-32-L	48	3	194	35	30	-	-	87	32
CA48-1360-32-L	48	3	222	40	34	-	-	87	32
CA48-1600-32-L	48	3	260	47	40	-	-	90	32
CA80-500-31-L	80	3	80	24	21	-	-	46	31
CA80-680-32-L	80	3	111	33	28	-	-	84	32
CA80-800-32-L	80	3	130	38	33	-	-	87	32

CEC Opportunity Charge 3-Phase Model

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-255-300C	24	3	64	-	-	3	-	20	30
CA24-375-300C	24	3	94	-	-	4	-	22	30
CA24-510-300C	24	3	128	-	-	5	-	25	30
CA24-680-330C	24	3	170	-	-	7	-	49	33
CA24-765-330C	24	3	191	-	-	8	-	55	33
CA24-880-330C	24	3	220	-	-	9	-	55	33
CA24-935-330C	24	3	234	-	-	10	-	87	33
CA24-1045-330C	24	3	260	-	-	11	-	90	33
CA24-1200-330C	24	3	300	-	-	12	-	94	33
CA24-1360-320C	24	3	340	-	-	14	-	97	32
CA36-510-330C	36	3	128	-	-	8	-	46	33
CA36-680-330C	36	3	170	-	-	10	-	49	33
CA36-765-330C	36	3	191	-	-	12	-	57	33
CA36-880-330C	36	3	220	-	-	13	-	57	33
CA36-935-330C	36	3	234	-	-	14	-	87	33
CA36-1045-330C	36	3	260	-	-	16	-	90	33
CA36-1200-330C	36	3	300	-	-	18	-	90	33
CA36-1360-320C	36	3	340	-	-	20	-	94	32
CA48-510-330C	48	3	128	-	-	11	-	49	33
CA48-595-330C	48	3	149	-	-	12	-	55	33
CA48-660-330C	48	3	165	-	-	13	-	55	33
CA48-765-330C	48	3	191	-	-	16	-	57	33
CA48-880-330C	48	3	220	-	-	17	-	57	33
CA48-935-320C	48	3	234	-	-	18	-	87	32
CA48-1045-320C	48	3	260	-	-	21	-	90	32
CA48-1190-320C	48	3	298	-	-	23	-	90	32
CA80-510-320C	80	3	128	-	-	17	-	86	32
CA80-680-320C	80	3	160	-	-	22	-	86	32
CA80-800-320C	80	3	200	-	-	26	-	90	32

CEC Opportunity Charge Low Voltage 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-255-300C-L	24	3	64	6	6	-	-	20	30
CA24-375-300C-L	24	3	94	9	8	-	-	22	30
CA24-510-300C-L	24	3	128	11	10	-	-	25	30
CA24-680-310C-L	24	3	170	16	14	-	-	49	31
CA24-765-320C-L	24	3	191	18	16	-	-	87	32
CA24-880-320C-L	24	3	220	23	20	-	-	90	32
CA24-935-320C-L	24	3	234	23	20	-	-	94	32
CA24-1045-320C-L	24	3	260	25	22	-	-	94	32
CA24-1190-320C-L	24	3	298	29	25	-	-	94	32
CA36-375-310C-L	36	3	94	13	11	-	-	43	31
CA36-510-310C-L	36	3	128	17	15	-	-	46	31
CA36-680-310C-L	36	3	170	23	20	-	-	49	31
CA36-765-320C-L	36	3	191	28	24	-	-	86	32
CA36-935-320C-L	36	3	234	33	29	-	-	86	32
CA36-1045-320C-L	36	3	260	37	32	-	-	90	32
CA36-1190-320C-L	36	3	298	42	36	-	-	90	32
CA36-1360-320C-L	36	3	340	48	41	-	-	94	32
CA48-510-310C-L	48	3	128	23	20	-	-	49	31
CA48-595-320C-L	48	3	149	28	24	-	-	86	32
CA48-680-320C-L	48	3	170	30	26	-	-	86	32
CA48-765-320C-L	48	3	191	37	32	-	-	87	32
CA48-935-320C-L	48	3	234	42	36	-	-	87	32
CA48-1045-320C-L	48	3	260	49	43	-	-	90	32
CA80-510-320C-L	80	3	128	38	33	-	-	86	32
CA80-635-320C-L	80	3	160	47	41	-	-	86	32

CEC Fast Charge 3-Phase Voltage

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight
CA24-510-33FC	24	3	204	-	-	8	-	55
CA24-550-33FC	24	3	220	-	-	9	-	55
CA24-600-33FC	24	3	240	-	-	10	-	57
CA24-750-33FC	24	3	300	-	-	12	-	61
CA24-880-32FC	24	3	352	-	-	14	-	94
CA24-1050-32FC	24	3	420	-	-	17	-	102
CA36-510-33FC	36	3	204	-	-	12	-	55
CA36-550-33FC	36	3	220	-	-	13	-	55
CA36-600-33FC	36	3	240	-	-	14	-	57
CA36-750-33FC	36	3	300	-	-	18	-	61
CA36-880-32FC	36	3	352	-	-	20	-	94
CA36-1050-32FC	36	3	420	-	-	26	-	102
CA48-550-33FC	48	3	220	-	-	17	-	57
CA48-600-32FC	48	3	240	-	-	19	-	90
CA48-765-32FC	48	3	306	-	-	24	-	94
CA48-825-32FC	48	3	330	-	-	26	-	94
CA80-500-32FC	80	3	200	-	-	26	-	88

CEC Conventional 3-Phase (Standard Cabinet)

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-510-34	24	3	83	-	-	4	-	113	34
CA24-680-34	24	3	111	-	-	5	-	113	34
CA24-765-34	24	3	125	-	-	5	-	116	34
CA24-935-34	24	3	152	-	-	6	-	116	34
CA24-1045-34	24	3	170	-	-	7	-	116	34
CA24-1190-34	24	3	194	-	-	8	-	122	34
CA24-1350-34	24	3	220	-	-	9	-	122	34
CA36-510-34	36	3	83	-	-	5	-	113	34
CA36-765-34	36	3	125	-	-	8	-	116	34
CA36-935-34	36	3	152	-	-	9	-	119	34
CA36-1045-34	36	3	170	-	-	10	-	119	34
CA36-1190-34	36	3	194	-	-	12	-	127	34
CA36-1275-34	36	3	208	-	-	13	-	127	34
CA36-1350-34	36	3	220	-	-	13	-	127	34
CA48-510-34	48	3	83	-	-	7	-	113	34
CA48-680-34	48	3	111	-	-	9	-	113	34
CA48-800-34	48	3	130	-	-	11	-	116	34
CA48-935-34	48	3	152	-	-	12	-	127	34
CA48-1010-34	48	3	165	-	-	14	-	127	34
CA48-1190-34	48	3	194	-	-	16	-	119	34
CA48-1350-34	48	3	220	-	-	17	-	150	34
CA80-300-34	80	3	42	-	-	6	-	110	34
CA80-500-34	80	3	80	-	-	11	-	113	34
CA80-615-34	80	3	100	-	-	13	-	123	34
CA80-680-34	80	3	111	-	-	15	-	143	34
CA80-800-34	80	3	130	-	-	17	-	146	34
CA80-935-34	80	3	152	-	-	20	-	146	34

CEC Opportunity Charge 3-Phase (Standard Cabinet)

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-510-34OC	24	3	128	-	-	5	-	116	34
CA24-680-34OC	24	3	170	-	-	7	-	116	34
CA24-765-34OC	24	3	191	-	-	8	-	122	34
CA24-880-34OC	24	3	220	-	-	9	-	122	34
CA24-935-34OC	24	3	234	-	-	10	-	124	34
CA24-1045-34OC	24	3	260	-	-	11	-	124	34
CA24-1200-34OC	24	3	300	-	-	12	-	129	34
CA24-1360-34OC	24	3	340	-	-	14	-	148	34
CA24-1445-34OC	24	3	361	-	-	15	-	148	34
CA24-1680-34OC	24	3	420	-	-	17	-	161	34
CA36-510-34OC	36	3	128	-	-	8	-	113	34
CA36-680-34OC	36	3	170	-	-	10	-	116	34
CA36-765-34OC	36	3	191	-	-	12	-	124	34
CA36-880-34OC	36	3	220	-	-	13	-	124	34
CA36-935-34OC	36	3	234	-	-	14	-	124	34
CA36-1045-34OC	36	3	260	-	-	16	-	126	34
CA36-1200-34OC	36	3	300	-	-	18	-	129	34
CA36-1360-34OC	36	3	340	-	-	20	-	148	34
CA36-1445-34OC	36	3	361	-	-	22	-	161	34
CA36-1680-34OC	36	3	420	-	-	26	-	161	34
CA48-510-34OC	48	3	128	-	-	11	-	116	34
CA48-595-34OC	48	3	149	-	-	12	-	122	34
CA48-660-34OC	48	3	165	-	-	13	-	122	34
CA48-765-34OC	48	3	191	-	-	16	-	124	34
CA48-880-34OC	48	3	220	-	-	18	-	126	34
CA48-935-34OC	48	3	234	-	-	18	-	141	34
CA48-1045-34OC	48	3	260	-	-	21	-	144	34

CEC Fast Charge 3-Phase (Standard Cabinet)

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-510-34FC	24	3	204	-	-	8	-	119	34
CA24-550-34FC	24	3	220	-	-	9	-	119	34
CA24-600-34FC	24	3	240	-	-	10	-	141	34
CA24-765-34FC	24	3	306	-	-	12	-	148	34
CA24-880-34FC	24	3	352	-	-	14	-	148	34
CA24-1050-34FC	24	3	420	-	-	17	-	161	34
CA36-510-34FC	36	3	204	-	-	12	-	124	34
CA36-550-34FC	36	3	220	-	-	13	-	124	34
CA36-600-34FC	36	3	240	-	-	14	-	141	34
CA36-765-34FC	36	3	306	-	-	18	-	148	34
CA36-880-34FC	36	3	352	-	-	20	-	161	34
CA36-1050-34FC	36	3	420	-	-	26	-	161	34
CA36-1235-34SFC	36	3	495	-	-	30	-	295	34
CA36-1500-34SFC	36	3	600	-	-	37	-	300	34
CA48-510-34FC	48	3	204	-	-	16	-	141	34
CA48-600-34FC	48	3	240	-	-	19	-	144	34
CA48-765-34FC	48	3	306	-	-	24	-	148	34
CA48-825-34FC	48	3	330	-	-	26	-	148	34
CA48-1000-34SFC	48	3	400	-	-	34	-	295	34
CA48-1235-34SFC	48	3	495	-	-	42	-	295	34
CA48-1500-34SFC	48	3	600	-	-	51	-	350	34
CA80-500-34FC	80	3	200	-	-	26	-	157	34
CA80-750-34SFC	80	3	300	-	-	39	-	270	34
CA80-1000-SFC	80	3	400	-	-	52	-	320	34

Multi-Circuit Conventional 3-Phase DC Output

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-510-34-2	12 (24)	3	83	-	-	8	-	149	34(1)
CA24-510-34-4	12 (24)	3	83	-	-	16	-	300	34(2)
CA24-510-34-6	12 (24)	3	83	-	-	24	-	450	34(3)
CA24-680-34-2	12 (24)	3	111	-	-	10	-	149	34(1)
CA24-680-34-4	12 (24)	3	111	-	-	20	-	300	34(2)
CA24-680-34-6	12 (24)	3	111	-	-	30	-	450	34(3)
CA24-765-34-2	12 (24)	3	125	-	-	10	-	155	34(1)
CA24-765-34-4	12 (24)	3	125	-	-	20	-	312	34(2)
CA24-765-34-6	12 (24)	3	125	-	-	30	-	468	34(3)
CA24-935-34-2	12 (24)	3	152	-	-	12	-	155	34(1)
CA24-935-34-4	12 (24)	3	152	-	-	24	-	312	34(2)
CA24-935-34-6	12 (24)	3	152	-	-	36	-	468	34(3)
CA24-1045-34-2	12 (24)	3	170	-	-	14	-	155	34(1)
CA24-1045-34-4	12 (24)	3	170	-	-	28	-	312	34(2)
CA24-1045-34-6	12 (24)	3	170	-	-	42	-	468	34(3)
CA24-1190-34-2	12 (24)	3	194	-	-	16	-	167	34(1)
CA24-1190-34-4	12 (24)	3	194	-	-	32	-	336	34(2)
CA24-1190-34-6	12 (24)	3	194	-	-	48	-	505	34(3)
CA24-1350-34-2	12 (24)	3	220	-	-	18	-	167	34(1)
CA24-1350-34-4	12 (24)	3	220	-	-	36	-	336	34(2)
CA24-1350-34-6	12 (24)	3	220	-	-	54	-	505	34(3)
CA36-510-34-2	18 (36)	3	83	-	-	10	-	149	34(1)
CA36-510-34-4	18 (36)	3	83	-	-	20	-	300	34(2)
CA36-510-34-6	18 (36)	3	83	-	-	30	-	450	34(3)
CA36-765-34-2	18 (36)	3	125	-	-	16	-	155	34(1)
CA36-765-34-4	18 (36)	3	125	-	-	32	-	312	34(2)
CA36-765-34-6	18 (36)	3	125	-	-	48	-	468	34(3)
CA36-935-34-2	18 (36)	3	152	-	-	18	-	155	34(1)
CA36-935-34-4	18 (36)	3	152	-	-	36	-	312	34(2)
CA36-935-34-6	18 (36)	3	152	-	-	54	-	468	34(3)
CA36-1045-34-2	18 (36)	3	170	-	-	20	-	155	34(1)
CA36-1045-34-4	18 (36)	3	170	-	-	40	-	312	34(2)
CA36-1045-34-6	18 (36)	3	170	-	-	60	-	468	34(3)
CA36-1190-34-2	18 (36)	3	194	-	-	24	-	174	34(1)
CA36-1190-34-4	18 (36)	3	194	-	-	48	-	350	34(2)
CA36-1190-34-6	18 (36)	3	194	-	-	62	-	526	34(3)
CA36-1275-34-2	18 (36)	3	208	-	-	26	-	174	34(1)
CA36-1275-34-4	18 (36)	3	208	-	-	52	-	350	34(2)
CA36-1275-34-6	18 (36)	3	208	-	-	78	-	526	34(3)
CA36-1350-34-2	18 (36)	3	220	-	-	26	-	174	34(1)
CA36-1350-34-4	18 (36)	3	220	-	-	52	-	350	34(2)
CA36-1350-34-6	18 (36)	3	220	-	-	78	-	526	34(3)
CA48-510-34-2	24 (48)	3	83	-	-	14	-	149	34(1)
CA48-510-34-4	24 (48)	3	83	-	-	28	-	300	34(2)
CA48-510-34-6	24 (48)	3	83	-	-	42	-	450	34(3)
CA48-680-34-2	24 (48)	3	111	-	-	18	-	149	34(1)
CA48-680-34-4	24 (48)	3	111	-	-	36	-	300	34(2)
CA48-680-34-6	24 (48)	3	111	-	-	54	-	450	34(3)
CA48-800-34-2	24 (48)	3	130	-	-	22	-	152	34(1)
CA48-800-34-4	24 (48)	3	130	-	-	44	-	306	34(2)
CA48-800-34-6	24 (48)	3	130	-	-	66	-	460	34(3)
CA48-935-34-2	24 (48)	3	152	-	-	24	-	174	34(1)
CA48-935-34-4	24 (48)	3	152	-	-	48	-	350	34(2)
CA48-935-34-6	24 (48)	3	152	-	-	72	-	526	34(3)
CA48-1010-34-2	24 (48)	3	165	-	-	28	-	174	34(1)
CA48-1010-34-4	24 (48)	3	165	-	-	56	-	350	34(2)
CA48-1010-34-6	24 (48)	3	165	-	-	84	-	526	34(3)
CA80-300-34-2	40 (80)	3	42	-	-	12	-	143	34(1)
CA80-300-34-4	40 (80)	3	42	-	-	24	-	288	34(2)
CA80-300-34-6	40 (80)	3	42	-	-	36	-	434	34(3)
CA80-500-34-2	40 (80)	3	80	-	-	22	-	149	34(1)
CA80-500-34-4	40 (80)	3	80	-	-	44	-	300	34(2)
CA80-500-34-6	40 (80)	3	80	-	-	66	-	450	34(3)
CA80-615-34-2	40 (80)	3	100	-	-	26	-	150	34(1)
CA80-615-34-4	40 (80)	3	100	-	-	52	-	302	34(2)
CA80-615-34-6	40 (80)	3	100	-	-	78	-	454	34(3)

Dual Circuit Opportunity Charge 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
CA24-510-34OC-2	12 (24)	3	128	-	-	10	-	154	34(1)
CA24-680-34OC-2	12 (24)	3	170	-	-	14	-	154	34(1)
CA24-765-34OC-2	12 (24)	3	191	-	-	16	-	167	34(1)
CA24-880-34OC-2	12 (24)	3	220	-	-	18	-	167	34(1)
CA24-935-34OC-2	12 (24)	3	234	-	-	20	-	171	34(1)
CA24-1045-34OC-2	12 (24)	3	260	-	-	20	-	171	34(1)
CA24-1200-34OC-2	12 (24)	3	300	-	-	24	-	178	34(1)
CA36-510-34OC-2	18 (36)	3	128	-	-	116	-	149	34(1)
CA36-680-34OC-2	18 (36)	3	170	-	-	20	-	155	34(1)
CA36-765-34OC-2	18 (36)	3	191	-	-	24	-	161	34(1)
CA36-880-34OC-2	18 (36)	3	220	-	-	26	-	161	34(1)
CA36-935-34OC-2	18 (36)	3	234	-	-	28	-	171	34(1)
CA36-1045-34OC-2	18 (36)	3	260	-	-	32	-	171	34(1)
CA36-1200-34OC-2	18 (36)	3	300	-	-	36	-	178	34(1)
CA48-510-34OC-2	24 (48)	3	128	-	-	22	-	155	34(1)
CA48-595-34OC-2	24 (48)	3	149	-	-	24	-	167	34(1)
CA48-660-34OC-2	24 (48)	3	165	-	-	26	-	167	34(1)
CA48-750-34OC-2	24 (48)	3	191	-	-	32	-	171	34(1)
CA48-880-34OC-2	24 (48)	3	220	-	-	36	-	175	34(1)
CA80-400-34OC-2	40 (80)	3	100	-	-	26	-	157	34(1)

Conventional High Voltage 3-Phase

Model	Voltage	Phase	DC Output	208 VAC	240 VAC	480 VAC	575 VAC	Weight	Cabinet
24-510-33-H	24	3	83	-	-	-	3	46	33
24-680-33-H	24	3	111	-	-	-	4	46	33
24-765-33-H	24	3	125	-	-	-	4	49	33
24-935-33-H	24	3	152	-	-	-	5	49	33
24-1045-33-H	24	3	170	-	-	-	5	49	33
24-1190-33-H	24	3	194	-	-	-	6	55	33
24-1350-33-H	24	3	220	-	-	-	7	55	33
36-375-33-H	36	3	61	-	-	-	3	43	33
36-510-33-H	36	3	83	-	-	-	4	46	33
36-765-33-H	36	3	125	-	-	-	6	49	33
36-935-33-H	36	3	152	-	-	-	7	49	33
36-1045-33-H	36	3	170	-	-	-	8	49	33
36-1190-33-H	36	3	194	-	-	-	9	57	33
36-1275-33-H	36	3	208	-	-	-	10	57	33
36-1350-33-H	36	3	220	-	-	-	10	60	33
36-1600-32-H	36	3	260	-	-	-	12	90	33
48-510-33-H	48	3	83	-	-	-	5	46	33
48-680-33-H	48	3	111	-	-	-	7	46	33
48-800-33-H	48	3	130	-	-	-	8	49	33
48-935-33-H	48	3	152	-	-	-	9	57	33
48-1010-33-H	48	3	165	-	-	-	10	57	33
48-1190-32-H	48	3	194	-	-	-	12	87	33
48-1360-32-H	48	3	222	-	-	-	14	87	33
48-1600-32-H	48	3	260	-	-	-	16	90	33
80-255-31-H	80	3	42	-	-	-	4	43	33
80-500-31-H	80	3	80	-	-	-	8	46	33
80-615-33-H	80	3	100	-	-	-	10	57	33
80-800-32-H	80	3	130	-	-	-	13	87	33
80-980-32-H	80	3	160	-	-	-	16	87	33
80-1045-32-H	80	3	170	-	-	-	17	87	33
80-1230-32-H	80	3	200	-	-	-	20	90	33